TR341 Series

Industrial Cellular Routers













TR341 has 5-RJ45, 1-RS232, 1-RS485, which is perfect for connecting the ethernet or serial port devices to cloud. And the captive portal feature is ideal for WIFI advertisement, optional of GPS is great for tracking remote assets. In addition, the dual SIM and auto switchover between WAN and WWAN, multiple VPN features provide robust and secure connectivity for data transmission.

IoT Router with Ethernet/Serial Port/WIFI/GPS

TR341 is a feature-rich and cost-effective IoT router designed for industrial

applications, such as vending machines, ATM, Kiosk, WIFI advertisement,

digital signage, smart traffic light, EV charging point.




TR341 is an OpenWrt based Linux OS industrial IoT router, which provides C/C++, Python programmable embedded environment for IoT developers and programmers to implement their industrial applications in a flexible and fast way.

Key Features

- Global 4G LTE/3G/2G cellular network supported
- Dual SIM(Option) for failover¹, auto switchover between wireless and wired WAN
- 4-LAN, 1-WAN, 1-RS232, 1-RS485, WIFI(802.11b/g/n), GPS(Option)
- 4. OpenWrt based Linux OS, provides programmable environment for C/C++, Python, LUA developers
- Captive portal for WIFI advertisement, and Radius WIFI for secure authentication² 5.
- 6. Multiple VPN protocols, IPsec, L2TP, PPTP, GRE and OpenVPN, to ensure secure data transmission
- LTE/3G/PPPoE DHCP and static address connection
- 8. DHCP server, DHCP binding MAC address, DDNS, firewall, NAT, DMZ host, QoS, traffic analysis
- 9. MQTT, Modbus RTU/TCP, TCP/UDP, HTTP, BGP, SNMP protocols
- 10. SPI Firewall, Port Mapping, DMZ Mapping, ACL, IP-MAC binding and Clone function
- 11. Web UI, telnet & SSH CLI, AT Command configuration
- Web upgrade, local and remote syslog, serial port output log
- SMS commands and DMP(Device Management Platform)³ for remote configuration and management

Applications

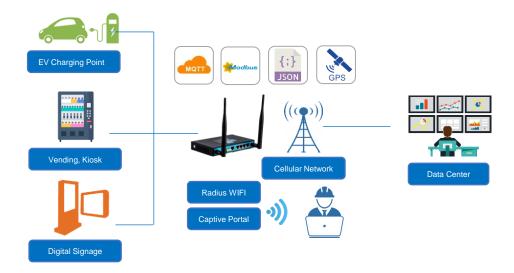

Success Cases











Specifications

Cellular Interfaces

Antenna 1 × 50 Ω SMA Female

Connector

• SIM Slot 1, or 2(DSSM, Option)

ESD Protection 15KV

Ethernet Interface

Ports
 5-RJ45 (1-WAN, 4-LAN or 5-LAN configurable)
 Data Rates
 10/100 Mbps (Auto-Sensing), Auto MDI/MDIX

ESD Protection 1.5KV

Serial Interfaces

Connector Terminal block, 3.5 mm female socket with lock

Ports 1-RS232, 1-RS485

Baud Rate 300bps to 230400bps

■ ESD protection 8KV for RS232, 15KV for RS485

Wi-Fi

Antenna Connector 1 × 50 Ω SMA Male

Standard IEEE 802.11b/g/n, AP and Client modes

Transmission Rate IEEE802.11b/g: Up to 54Mbps IEEE802.11n: Up to 300Mbps

Security Open, WPA, WPA2, WPA/WPA2 Enterprise,

Radius

• Tx Power 18dBm (11g), 21dBm (11b)

Rx Sensitivity <-72dBm@54Mpbs

GPS (Optional)

Connector

Module
 Built-in independent GPS Module

Antenna $1 \times 50 \Omega$ SMA Female

Software

Network Protocols
 PPP, PPPoE, SNMP v1/v2c/v3, TCP, UDP,

DHCP, RIPv1/v2, OSPF, BGP, DNS, DDNS,

HTTP, ARP, QoS, SNTP, Telnet, SSH
Serial Port MQTT, Transparent (TCP Client/Server, UDP

Client/Server), Modbus Gateway (Modbus RTU

to Modbus TCP)

• VPN Tunnel IPsec/PPTP/L2TP/GRE/OpenVPN

Firewall ACL/DMZ/Port Mapping/MAC Binding
 Management Web, CLI, SMS, Cloud DMP (Device

Management Platform)

Reliability WWAN and WAN Failover, Dual SIM Backup

and Load Balance, Hardware & Software

Watchdog

Secondary OpenWrt based Linux OS, support C/C++

Development Python, LUA and SDK

Power Supply and Consumption

Connector Plug-In
 Standard Power DC 12V/1.5A
 Input Voltage 5-35 VDC

Power Consumption 280 ~ 330mA@12VDC
 Idle Consumption 190 ~ 240mA@12VDC

Physical Characteristics

Ingress Protection IP30
 Housing & Weight Metal

Dimensions
 530 g(1.17lbs), without accessories
 168 x 104 x 27mm (6.61 x 4.09 x 1.06 in)

Mounting Desktop, Wall mount

Environmental

Operating Temperature
 Storage Temperature
 Relative Humidity
 -35°C to +75°C (-31°F to +167°F)
 -40°C to +80°C (-40°F to +176°F)
 5% to 95% (non-condensing)

Ethernet Isolation 1.5 kV RMS

Others

Reset Button 1

LED Indicators
 Power, WAN, LAN, WIFI, System, Alarm,

Built-in Watchdog, RTC, Timer
Approvals⁴ CE, RCM*, FCC*, NBTC
Warranty Period⁵ Standard: 12 Months
Extended: 2-5 Years

Standard Package Content

1. 2.	TR341 Router Power Adapter(DC 12V/1.5A, EU/US/UK/AU plug optional)	1 PCS 1 PCS
3.	RP-SMA WIFI Antenna (19.5cm, 5dBi)	1 PCS
4.	Mag-mount Cellular Antenna (SMA	1 PCS
	Male, 1 meter, 5dBi)	
5.	RS232 Cable (DB9 Female, 1 meter)	1 PCS
6.	Ethernet Cable(1 meter)	1 PCS
7.	5-Pin Terminal Block	1 PCS
8.	Wall mount kits	1 PCS


Order Information

Model	Part Number	Description	Cellular Network	Frequency Band ⁶
TR341-LF	TR341-L<1><2>-<3>	4G, WIFI, 1-RS232, 1-RS485, 5- RJ45		4G LTE CAT 4 • EMEA/Asia:
1. <1> Means modules for different cellular network, countries and regions 2. <2> DS=Dual SIM on single module, for failover only 3. <3> W=2.4G single band WIFI G=GPS, independent GPS module		4G LTE 3G/WCDMA/UMTS/HSPA+ EDGE/GPRS	B1/B3/B5/B7/B8/B20/B38/B40/B41 ANZ/LATAM: B1/B3/B5/B7/B8/B28 NA: B2/B4/B5/B12/B13/B14	
TR341-W	TR341-W<1><2>-<3>	3G, WIFI, 1-RS232, 1-RS485, 5- RJ45	3G/WCDMA/UMTS/HSPA+ EDGE/GPRS	Global: 850/900/1900/2100


Note

- 1. Dual SIM is an optional feature, it's Dual SIM on Single Module(DSSM), supports failover between 2 operators 2. Available on customized firmware
- 3. There has a license fee for DMP
- 4. * Under progress
- 5. Price of the extended warranty will be different.
- 6. If you couldn't find the frequency band for your regions or have any questions, please contact Bivocom sales representatives for more information.
- 7. To save the earth, Bivocom doesn't print the user guide, if you need it, please go to Bivocom website to download.

Dimensions(mm)

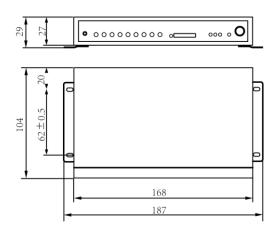

Side Views

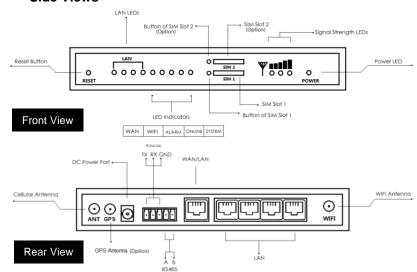

Related Products





- √ 4G LTE or LTE-M/NB-IoT
- ✓ OpenWrt based Linux OS, C/C++, Python programmable
- ✓ 1-R232, 1-RS485, 2-RJ45
- ✓ Modbus RTU/TCP, MQTT, VPN

Industrial IoT Gateway TG451 Series



- ✓ 4G LTE CAT 4, or CAT6
- ✓ Dual SIM, or Dual Module
- ✓ Rich I/O and customizable industrial protocols
- OpenWrt based Linux OS, C/C++, Python programmable
- ✓ Captive port and Radius WIFI